


AN-1000X

POWERED MONITOR



(AN-1000X Back Panel Shown)

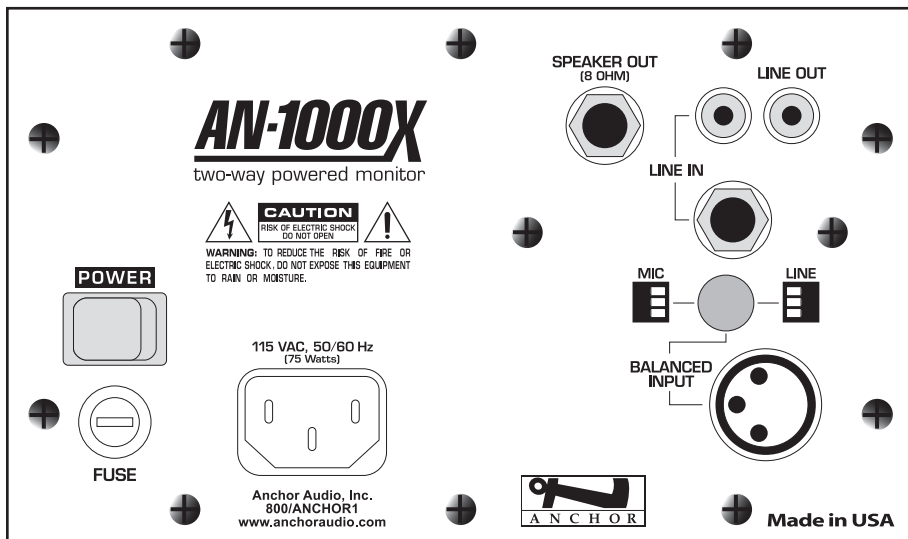

MODELS

AN-1000X

Powered 50-watt monitor speaker

ACCESSORIES

AN-1001X
Unpowered companion speaker

AN-1001X/70
Two-way speaker with internal
70 volt transformer

MIC-90
Professional dynamic, cardioid
pattern handheld mic

SS-250
Speaker stand

MSB-201
Combination mic/speaker stand

SB-1
Swivel stand mounting bracket

RM-1
Single rackmount kit

RM-12
Dual rackmount kit

SB-3
Wall mounting bracket

SB-360
360° Swivel wall mounting
bracket

HC-1550
Custom traveling hard case

HS-1
Carry handle

CC-100
Storage bag

MADE IN THE USA!

Reach crowds of 400+

Delivers up to 103 dB
of clear sound

Bass and Treble controls

50 watt sound system with
response from 65Hz - 20kHz

RCA and 1/4" line inputs

Mic/line configurable XLR input

Magnetically shielded speaker

220 volt CE-compliant
model available

Durable injection-molded case

2-way speaker system
combines 4.5" woofer and
dome tweeter


Speaker output drives
companion speaker

6-YEAR WARRANTY!

SPECIFICATIONS

AN-1000X

Rated power:	50 watts continuous @ 4Ω
Frequency response:	65 Hz - 20 kHz ± 3dB
Max SPL @ rated power:	103 dB @ 1 meter
Balanced input:	mic / line configurable, female XLR, switchable phantom power
Line input:	Hi-Z, unbalanced, 1/4"-phone & RCA
Line output:	Lo-Z, RCA, buffer isolated line-level
Speaker output:	8Ω, unswitched, 1/4"-phone
AC power requirements	
AN-1000X:	110 - 125Vac, 50/60 Hz, 90W Max
AN-1000X/220:	208 - 240Vac, 50/60 Hz, 90W Max
Dimensions (HWD):	5.25 x 8.4 x 9", 13 x 21 x 23 cm
Weight:	9.5 lbs, 4.3 Kg

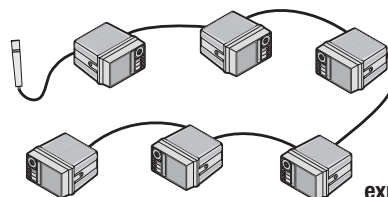

AN-1000X Daisy-Chain

Simple line-out
to line-in connection
expands your coverage

Specifications subject to change without notice.